

SONABEAM™ 155-S from fSONA. Getting Connected was Never Easier.

SONAbeam™'s Free Space Optical (FSO) technology uses invisible light beams to deliver high-speed optical communications that offer fiber-like data rates and availability with the simplicity of a wireless solution.

SONAbeam™ eliminates the substantial costs of digging up streets and sidewalks to install a fiber link. Unlike other wireless solutions, SONAbeam™ is immune to electro-magnetic (EM) or radio-frequency (RF) interference and because it does not radiate RF energy, costly spectrum licenses are not required. Plus, SONAbeam™'s narrow, highly-directional transmission prevents eavesdropping or interception.



Utilizing advanced FSO technology at the eye-safe 1550 nm wavelength, fSONA has created the most powerful FSO technology ever brought to market. Our rugged, reliable and robust SONAbeam™ systems are uniquely able to leverage your legacy architecture investments and create vast new connectivity and revenue opportunities.

fSONA Communications Corporation

#140 - 11120 Horseshoe Way,
Richmond, BC, Canada V7A 5H7
info@fsona.com
www.fsona.com

Telephone 604.273.6333
Facsimile 604.273.6391
U.S.A. & Canada 877.Go.fSONA (463.7662)
International 877.2.Go.fSONA (463.7662)



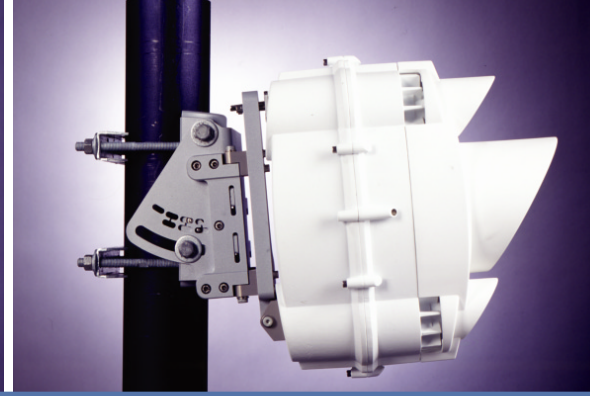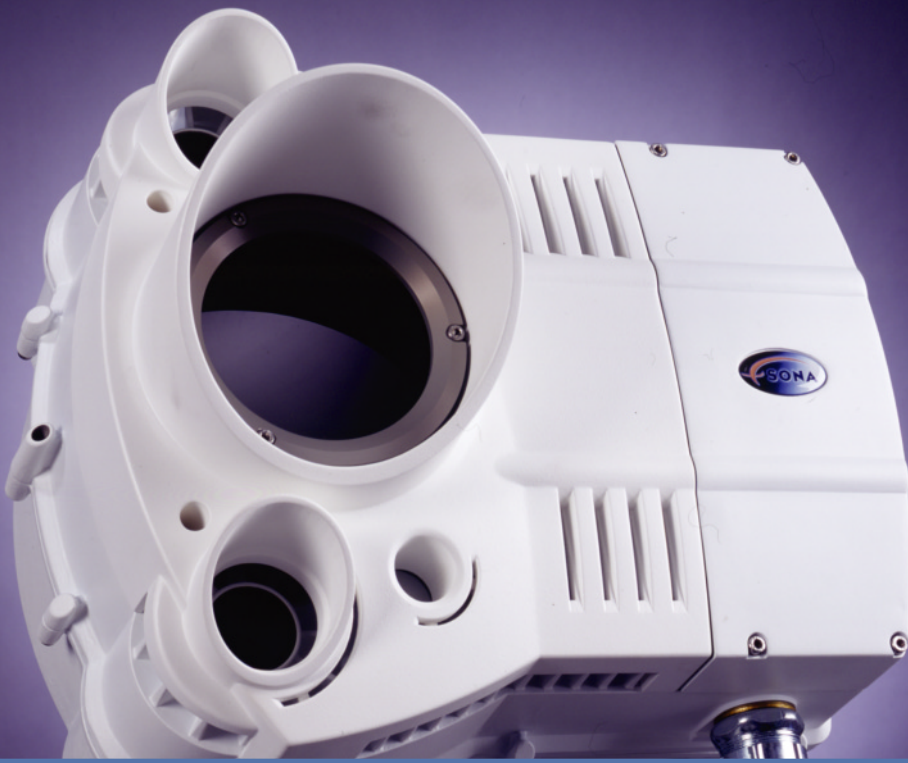

SONABeam™ 155-S OC-3, STM-1, FDDI, Fast Ethernet

Free-Space Optical

Transmission rates	125 Mbps (Fast-E, FDDI compliant) or 155 Mbps (OC-3, STM-1 compliant)
Operational range	75 m to 2300 m (250 ft to 1.4 mi)
Laser output power	320 mw peak (2 transmitters at 160mW)
Free-space wavelength	1550 nm
Transmitter type	Directly modulated laser diode
Receive aperture	10cm (4 in) diameter

Mechanical / Electrical / Environmental

Operating temperature	-40 to 60°C (-40 to 140°F)
Solar filters	2 spatial, 2 spectral
Pointing stability	120 km/h (75mp/h) operating > 160 km/h (100 mp/h) survivability
Environmental seal	Water-tight
Dimensions (W*H*D)	Cm: 43 x 40 x 31 (in: 17 x 16 x 12)
Weight	Optical Head: 17 kg (37 lbs); Mount: 6 kg (13 lbs)
Input Voltage	Internal 85 - 260 VAC, 50/60 Hz
Power consumption	Transceiver: 40 watts, max Heaters: 200 watts, max

Carrier-Class Reliability and Durability

Interior heating	CO ₂ prevents optics from fogging and snow/sleet accumulation
Laser cooling	Active solid state cooling (100,25 even in desert conditions)
Redundant transmitters	2 totally independent lasers, drivers, coolers and cooler controllers
Power supply	> 1 million hour MTBF
Structure	Cast aluminum housing & mount
Service life	15 years

Fiber-Optic Interface

Interface type	SM or MM fiber, SC terminated
Fiber xmtr wavelength	1310 nm nominal (1280 nm to 1335 nm)
Fiber rcvr wavelength	1310 nm nominal (1280 nm to 1335 nm)
Fiber xmtr output power	-15dBm (min), -13dBm (typical), -8dBm (max)
Fiber rcvr input power	-34 dBm (min), 3 dBm (max) (Recommend -30 to -6 dBm)

Element Management and Control

Interface	RS-232 serial (DB9 or RJ-45)
SNMP	Yes: includes custom MIBs
GUI control program	SONABeam Terminal Controller (STC 155-S)
Command line interface	Telnet interface or via STC 155-S
Key parameters monitored	Receive signal strength Adaptive power control settings Laser bias currents Laser modulation currents Laser temperatures Internal temperature and humidity Clock recovery / sync status Network interface signal status
Historical logging	Both SNMP Agent and STC 155-S offer extended term logging capability

Certifications and Classifications

Laser Safety	USA	Canada	Europe
	CDRH 21 CFR 1040 including Laser Notice 50, Class 1M ANSI Z136.1 & Z136.6, Class 1	CDRH 21 CFR 1040 including Laser Notice 50, Class 1M	IEC 60825-1, Class 1M
EMC	FCC - Part 15	ICES - 003	EN55022 - em EN55024 - immunity
Electrical Safety	UL 60950	CSA 60950	EN60950 (CB sch

Specifications are subject to change without notice. Please contact your sales representative for further information.